


ME Pneumatic actuated Connection Tool, 0.08 to 0.13in sealing range, 500psi (34.5bar) pressure, 1/8 NPT Female termination, Anodized Aluminum construction with FDA FKM seal materials.

SKU: ME001002

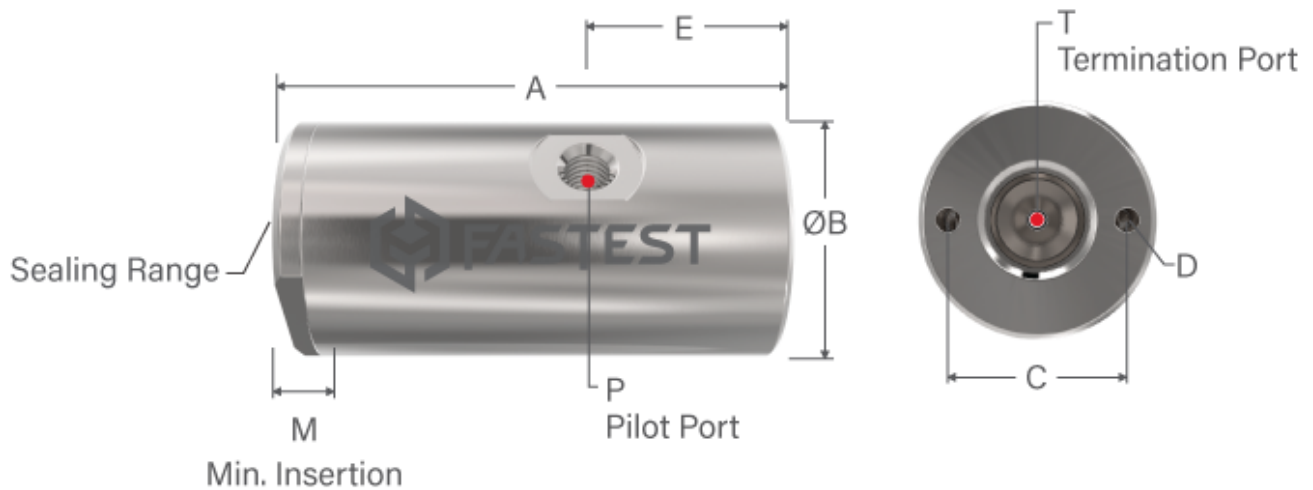

Actuation: Pneumatic

Pressure Rating: 34.5bar (500psi)

Vacuum Rating: 10millitorr

Leak Rate Capability: 1E-5cc/s He

Connection / Application Method: semi-automated or fully automated

Grip Method: Fixturing/Seal friction

Dim A: 43.7mm (1.72in)



Dim B: 21.3mm (0.84in)

Dim C: 16mm (.63in)

Dim E: 18.3mm (.72in)

DIM M - Insertion Depth: 4.1mm (.16in)

Termination Port (T): 1/8 NPT

Pilot Pressure: 6.2bar (90psi)

Pilot Port Termination (P): 10-32 UNF

Max Termination Torque: 11N-m (8ft-lbs)

Mounting Hole Size: 4-40 UNC